









### Features:

- Cooler running, outboard bearing provides maintenance-free operation
- Environmentally friendly oil-free technology
- Extremely quiet operation
- All motors are standard TEFC with Class F insulation, UL recognized, CE Compliant  
*Explosion-Proof motors available*
- Custom construction blowers are available
- Rugged die cast aluminum construction


Performance curve for Vacuum pump

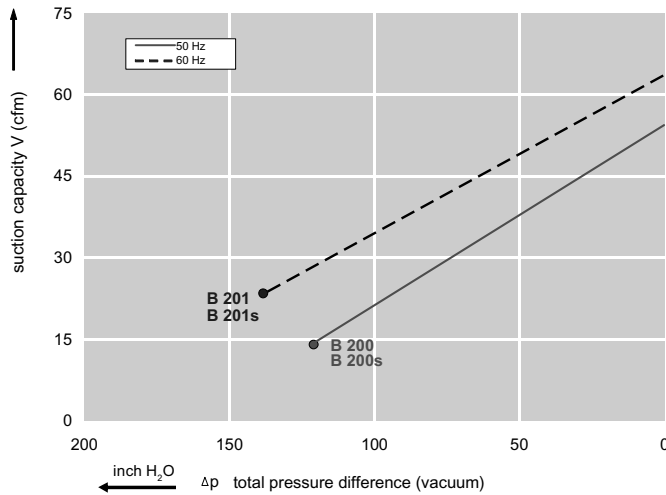

Performance curve for Compressor

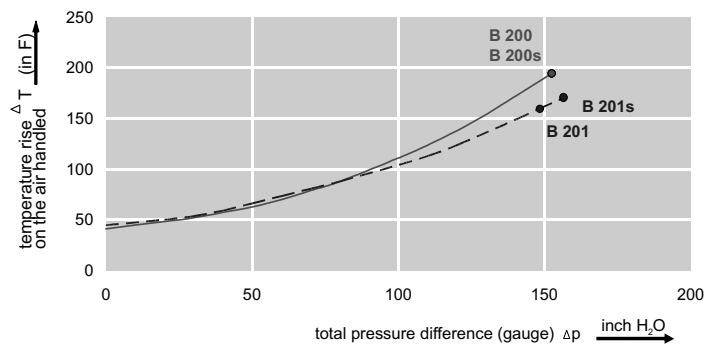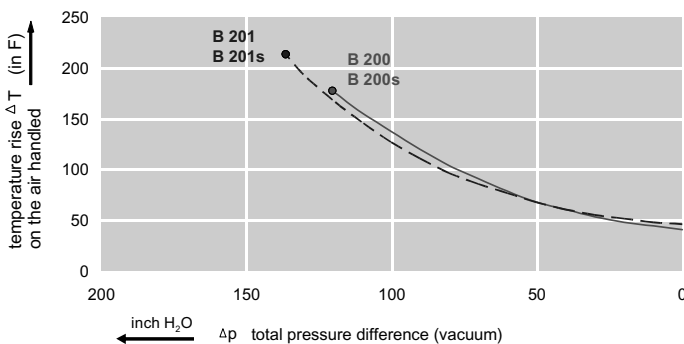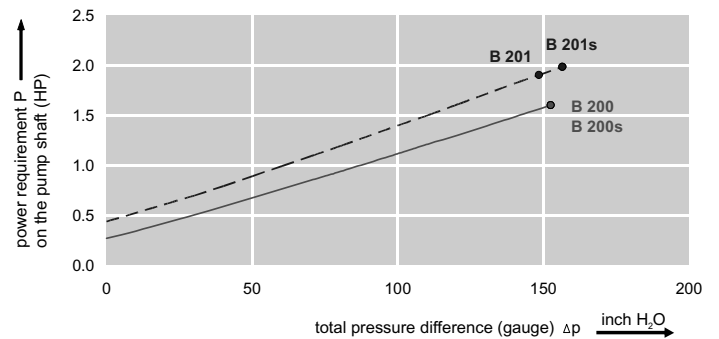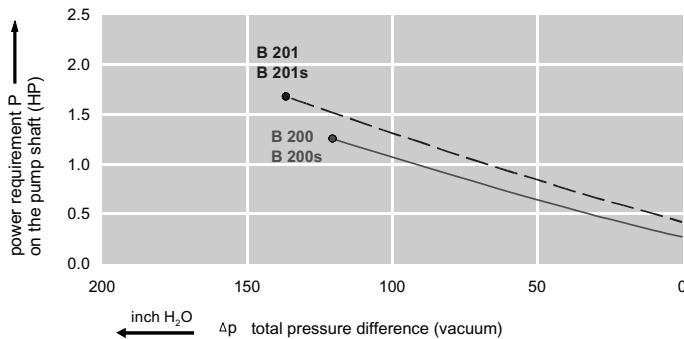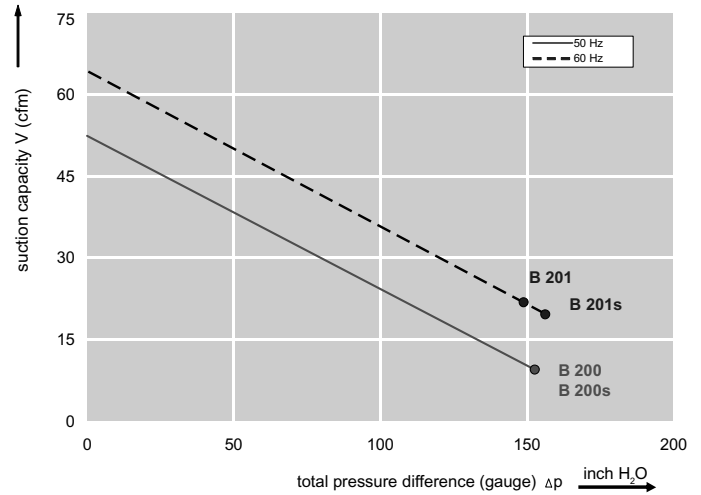

### Dimensions: (inches)

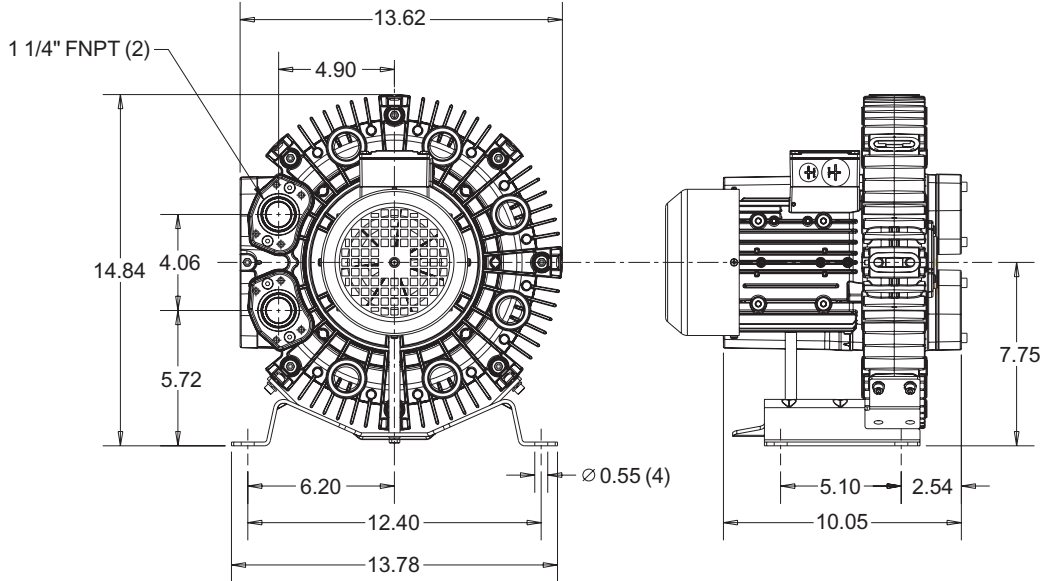

### Recommended Accessories:

#### Relief valve:

VC51Z (Vacuum)  
PC51Z (Pressure)

#### Filter:

ATF-125-1337  
(Vacuum)  
AF-S20-125-10  
(Pressure)

Specifications subject to change without notice. Please contact factory for specification updates.

### Selection & Ordering Data - Type 3BA7410

Curve No.	Order No.	Fre- quency Hz	Rated power HP	Input voltage		Input current A	Permissible total differential pressure		Sound pressure level dB(A)	Weight lbs	
				V			Vacuum inch H2O	Compressor inch H2O			
<b>3~ 50/60 Hz IP55 insulation material class F</b>											
B 200	3BA7410-0AT16	50	1.47	200D ... 240D	345Y ... 415Y	5.4D	3.1Y	-120	153	58	51
B 201	3BA7410-0AT16	60	2.01	220D ... 250D	415Y ... 460Y	5.5D	3.2Y	-136	149	62	51
<b>1~ 50/60 Hz IP55 with attached capacitor for continuous operation</b>											
B 200s	3BA7410-0AS45	50	1.47	115	230	13	6.5	-120	153	58	51
B 201s	3BA7410-0AS45	60	1.74	115	230	14	7	-136	157	62	51

Suitable for 208 Volt Operation