
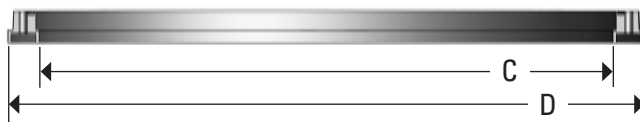


# RLA Riser-to-Lid Adapters



## Applications

Oreco® riser-to-lid adapters (RLAs) provide a secure, water-tight method of attaching an Oreco fiberglass lid to a 24-in. or 30-in. ribbed PVC access riser.

RLAs are especially useful when the top of the riser is uneven or has a damaged edge.

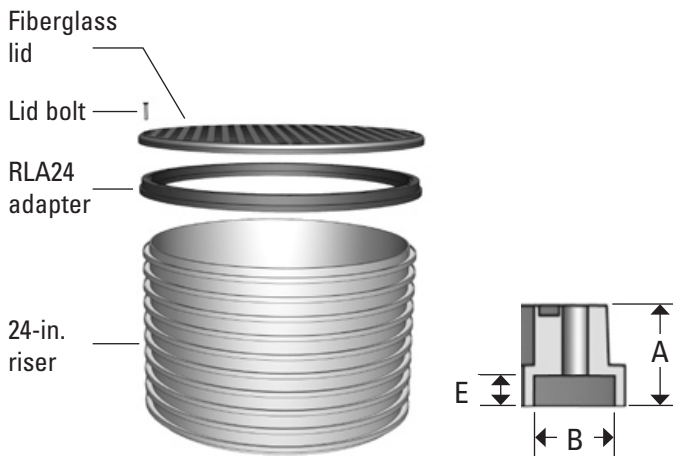

*RLA24 riser-to-lid adapter*

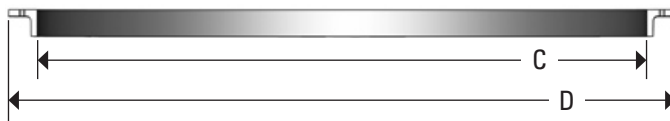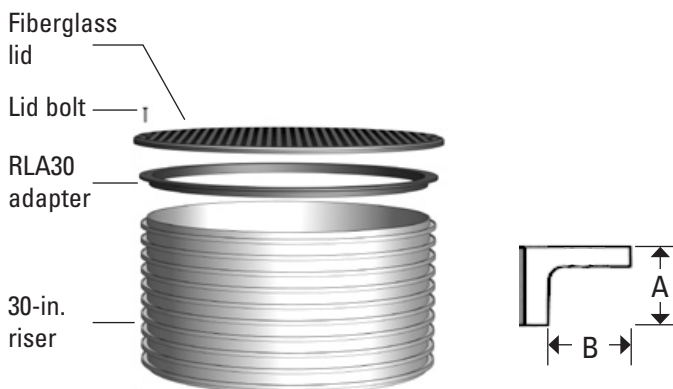

*RLA30 riser-to-lid adapter*

## General


RLA adapters can be attached to 24-in. or 30-in. risers to simplify bolting a lid to the riser. Use a methacrylate adhesive — either MA320, SS115, or SS140 — to bond RLAs to risers.

The RLA24 comes standard with an O-ring gasket and 12 pre-drilled bolt holes. It can also be ordered without the O-ring gasket, for use with Oreco's FL24G-4B riser lids. The RLA30 has no gasket and does not come predrilled for lid bolts.

## Standard Models

RLA24, RLA30

## Nomenclature



## Materials of Construction

Adapter	ABS
O-ring	EPDM

## Specifications

Dimensions in inches (mm)	RLA24	RLA30
A – Adapter height	1¼ (32)	1¼ (32)
B – Socket or lip width	1 (25)	1 (25)
C – Inside diameter	22⅞ (581)	28½ (724)
D – Outside diameter	25½ (648)	31 (787)
E – Socket depth	¾ (10)	N/A
Riser style	Perma-Loc™ Ultra-Rib™	Perma-Loc