



# Pipe Grommets

Submittal  
Data Sheet



## Applications

Oreco Pipe Grommets are used to provide a seal to prevent the passage of liquids through pipe ports.

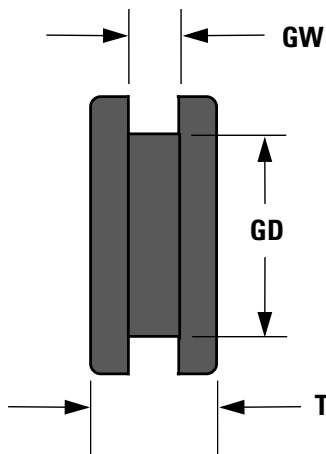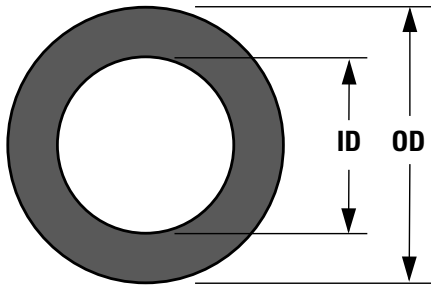

## General

Oreco Pipe Grommets are constructed of corrosion-resistant rubber to provide long-lasting seals. Grommets conform to standard IPS sizes. Not all models conform exactly to the depiction shown.

## Standard Models

G05L, G075L, G1L, G125L, G150L, G2L, G3L, G4L, G6L

## Nomenclature

<b>G</b>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<b>L</b>
	Indicates not installed			
	Indicates grommet diameter:			
	05	=	1/2"	
	075	=	3/4"	
	1	=	1"	
	125	=	1-1/4"	
	150	=	1-1/2"	
	2	=	2"	
	3	=	3"	
	4	=	4"	
	6	=	6"	
	Grommet			

## Specifications

### Dimensions

Model	G05L	G075L	G1L	G125L	G150L	G2L	G3L	G4L	G6L
OD (inches)	1 1/4	1 1/2	1 7/8	2 1/8	2 1/2	3 7/8	5	6	8 1/8
ID (inches)	3/4	1	1 1/4	1 1/2	1 3/4	2 1/8	3 1/4	4 3/16	6 11/16
GD (inches)	1	1 1/4	1 5/8	1 3/4	2 1/8	2 11/16	3 13/16	4 15/16	7 5/8
GW (inches)	3/16	3/16	1/4	1/4	1/4	5/16	5/16	1/4	1/4
T (inches)	1/2	7/16	9/16	5/8	5/8	15/16	15/16	7/8	13/16
Holesaw Size (inches)	1	1 1/4	1 9/16	1 3/4	2 1/8	2 3/4	3 7/8	5	7

### Material of Construction:

EPDM synthetic rubber in accordance with MIL-STD-417, 60 durometer.